




bluglass

80
l/hstainless
STEELtouch
screenICE
BANKGAS
R290

fizz

BLUGLASS 80 PLUS

Cooling capacity (l/h)	80
Max continuous supply (l)	45
Cold water temperature*	5 - 12 °C
Pump	Professional rotary carbonation pump
Cooling technology	Ice bank - double coil
Ice bank capacity (l)	15
Ice bank (kg)	5
Condensation	Forced ventilation
Refrigerant gas	R290
Adjustable thermostat	Yes
Supply	230 V - 50 Hz
Compressor power	1/5 HP
Absorbed power	400 W - 2 A
Working room temperature	Min 5°C - Max 35°C
Inlet water pipe	Ø5/16" (8 mm)
Inlet CO ₂ pipe	Ø5/16" (8 mm)
Dispensing area height (mm)	313
Typology	Countertop
Net weight (kg)	36
Gross weight (kg)	39
Dimensions W x D x H (mm)	400 x 580 x 564
Packaging dimensions (mm)	460 x 630 x 680

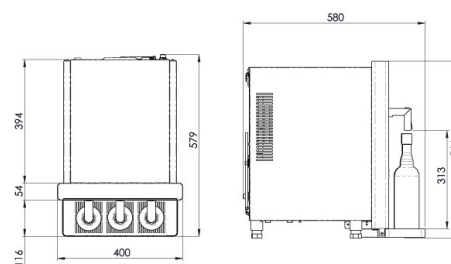

Dispensing options	Cold still water, cold sparkling water and room temperature water
Materials	Stainless steel and tempered glass
Push buttons	7" touch screen
Alarms	No water, no gas

OPTIONAL

Drip tray with drain	
Portioning system	
Nanotech tube	
Filters	Activated carbon filter, UVC out

* rated at a room temp. of 25 °C and inlet water temp. of 20 °C

CERTIFICATIONS

